

全鋁質及全不鏽鋼空氣濾網

Aluminum & Stainless Steel Air Filter

Testing Method 測試方法	Thickness 厚度	Arrestance (%)比重法	Dust Holding Capacity (g/ft ²) 集塵能力(公克/平方呎)
	1 "	71.5%	90.8
	2 "	81.3%	142.0
ASHRAE Standard 52.1-1992 (Equal to EN 779)			

All Aluminum & Stainless Steel Air Filters have a complete selection of standard sizes. Special sizes are available upon request.

Because the filters are manufactured of 100% aluminum or stainless frames and filter media, they can be easily cleaned and serviced for saving your coasts and providing durable life span for filtration uses.

這兩種濾網均可容易地被清洗及保養，節省使用成本，並具耐用及壽命長之優點。

All Aluminum Air Filter

All Aluminum air filter is the most economic and most effective way for industrial ventilation equipment. Filter is formed with 7 layers of different density (pore size from coarse and fine) of aluminum screen wires; dust collection capacity and efficiency are very good. It is different from the local made filters with the same aluminum mesh aperture.

全鋁質空氣過濾網



此濾網是解決工業空氣通風設備中最經濟也最有效的方法濾材是由七層不同密度(孔徑由粗而細)之擴張鋁網製成之濾網，其集塵能力及效率相當好。

Stainless Steel Air Filter

All Stainless Steel Air Filter has low resistance and high dust collection capacity which make this filter to be an ideal filter for many industrial uses. The filter media is composed of multi-layers of pleated and corrugated stainless steel screen wires. The cross stainless bars are attached to the both sides of media pack for adding rigidity. The construction offers maximum filter surface area.

全不銹鋼空氣過濾網

此濾網具有低壓損、高集塵能力，適合於工業界使用。濾材是由多層交叉縱橫波浪皺褶不銹鋼網所組成，並有交叉鋼條於濾材兩面補強，增加其堅固性。此多層濾材結構擴大濾網之表面積。

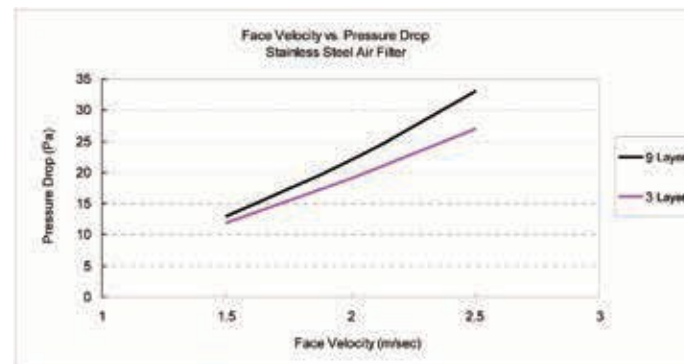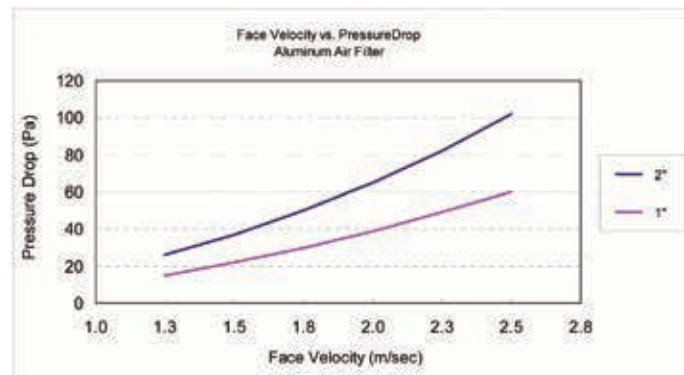



Performance Data - Aluminum & Stainless Steel Air Filters

初級濾網性能表 - 全鋁質及全不鏽鋼空氣濾網

Efficiency 效率 (%)		Nominal Size 通稱尺寸 (W*H*D) (inch)	Actual Size 實際尺寸 (W*H*D) (mm)	Rated Capacity 額定風量 (CMH)	Pressure Drop 壓力損失 (Pa)	
Dot Spot Efficiency (in NBS) 比色法	Arrestance (in AFI) 比重法				Initial Resistance 初壓損	Final Resistance 末壓損
-	71.5	12*24*1	289*595*22	1700	22.5	45
		20*20*1	492*492*22	2380		
		20*24*1	492*595*22	2800		
		24*24*1	595*595*22	3400		
-	81.3	12*24*2	289*595*45	1700	32.3	65
		20*20*2	492*492*45	2380		
		20*24*2	492*595*45	2800		
		24*24*2	595*595*45	3400		

* Special Sizes are available upon request.

※特殊規格可生產製造。

Material and Service Conditions

材質、使用條件

Type 型式		Description 說明	
Construction 總成	Media 濾材	Stainless Steel 不鏽鋼	Aluminum 鋁質
	Frame Material 外框材質	Metal Frame 金屬框	
Service Conditions 使用條件	The maximum continuous use temperature 連續使用最高溫度	°C	60
	Instant Highest Humidity 使用瞬間最高濕度	% RH	100 (No condensation state) 100 (無結露狀態下)



康聖國際貿易有限公司

KANGSANG INTERNATIONAL TREAD CO., LTD



康智富科技有限公司

K.J.F CLEAN CO., LTD

電話：02-29209031(代表號) 傳真：02-89236067

地址：234 新北市永和區仁愛路141巷30弄26號1樓

E-Mail：ks.best@msa.hinet.net

https://29209031.com.tw/