



HAS024 series 10~24W Wall Mount Adapter

SINGLE OUTPUT




UNIVERSAL INPUT

AC/DC Switching Adapter High Performance

DIMENSIONS

● L75*W55*H34.5mm (Max.)

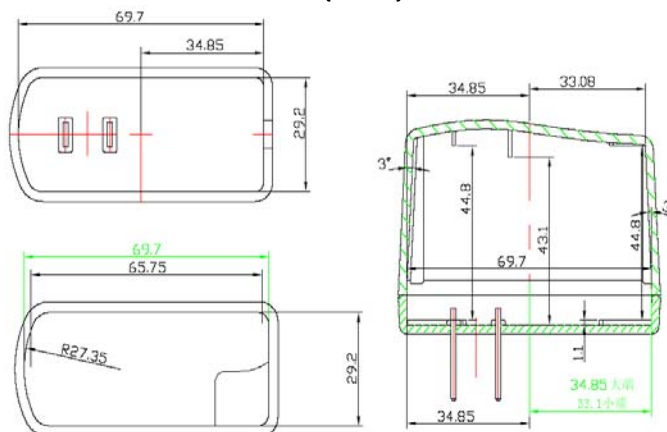

AC Plug Type: With US/EU/UK/AA

FEATURE

- Universal Input Voltage 90 to 264VAC
- High Efficiency 80% typical
- High Reliability
- Low Ripple & Noise
- Short Circuit Protection
- Over Voltage Protection
- Limited Power Source

ENVIRONMENTAL

- Operating Temperature: 0℃ ~ +40℃
- Operating Humidity: 20% ~ 85%
- Storage Temperature: - 40℃ ~ +70℃
- Storage Humidity: 10% ~ 95%
- Hi-Pot: 3,000VAC 1Sec. (P. to S.) for class II
- MTBF > 50,000Hrs at 25℃

* Output Voltage/Current Rating Chart

Model Name	Output Wattage	Output Voltage	Output Current	Application
HAS01005Z-ZZ	10W	5V	2A	External enclosure, Set-Top Box, Telecom, POS, DVD player...etc.
HAS01505Z-ZZ	15W	5V	3A	
HAS02009Z-ZZ	19.8W	9V	2.2A	
HAS01512Z-ZZ	15W	12V	1.25A	
HAS02412Z-ZZ	24W	12V	2A	
HAS01215U-Y1	12W	15V	0.8A	



Approval standard : UL62368, EN62368
Safety application : 40℃ Ambient temperature

★ Meets the requirements of these agencies



威海電子股份有限公司
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.)

TEL: 886-2-82273718 FAX: 886-2-82273719 E-MAIL:sales@wpe.com.tw