

ASS-132 series 82W~132W

Desk-Top Adapter

SINGLE OUTPUT




Power Saving Standard Mode High Performance

DIMENSION

- L150x W71x H25.5mm(Max.)

AC inlet : IEC-320-C6 Type

Unit : mm
Tolerance : ±0.2mm

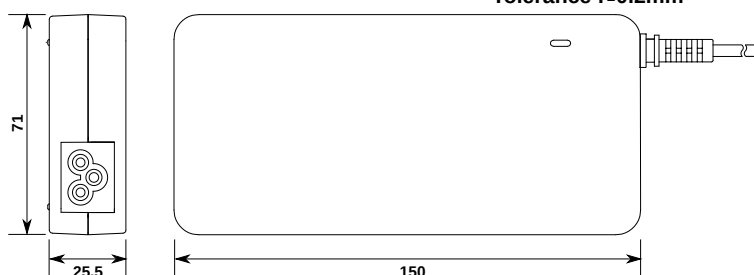

FEATURE

- 90 to 264 VAC universal input
- High efficiency 89% typical
- High reliability
- Low ripple & noise
- Short circuit protection
- Over voltage protection
- Limited power source

ENVIRONMENTAL

- Operating temperature: -20°C ~ +40°C
- Operating humidity: 20% ~ 85%
- Storage temperature: - 40°C ~ +70°C
- Storage humidity: 10% ~ 95%
- Hi-pot 1,800VAC 60sec.(P. to S.) class I
- MTBF > 50,000hrs at 25°C

Output Voltage/Current Rating Chart

Model Name	Output Wattage	Output Voltage	Output Current
ASS-082-12	82W	12V	6.8A
ASS-090-12	90W	12V	7.5A
ASS-085-15	84W	15V	5.6A
ASS-120-19	120W	19V	6.3A
ASS-100-24	100W	24V	4.16A
ASS-120-24	120W	24V	5.0A
ASS-132-24	132W	24V	5.5A
ASS-100-54	100W	54V	1.85A
ASS-120-54	120W	54V	2.2A
ASS-120-56	120W	56V	2.14A



Approval standard : UL62368, EN62368

Safety application : 40°C Ambient temperature

★ Meets the requirements of these agencies



威海電子股份有限公司
WEIHAI POWER ELECTRONICS CO.,LTD.

6F. -6, No.700, Jhongjheng Rd., Jhonghe Dist.,
New Taipei City 235, Taiwan (R.O.C.)
TEL: 886-2-82273718 FAX: 886-2-82273719
E-MAIL: sales@wpe.com.tw